

## TRIAC series

### 1 Description

BCR08 series triacs with low holding and latching current are especially recommended for use on middle and small resistance type power load.



TO-220F provides insulation voltage rated at 2000V RMS from all three terminals to external heatsink. TO-220F series comply with UL standards (File ref: E252906).

### 2 Features

- High current output up to 8A
- Low Peak on-state voltage drop
- High voltage
- High reliability

### 3 Applications

- jet pumps of dishwashers
- fans of air-conditioner
- power charger
- AC Motor control

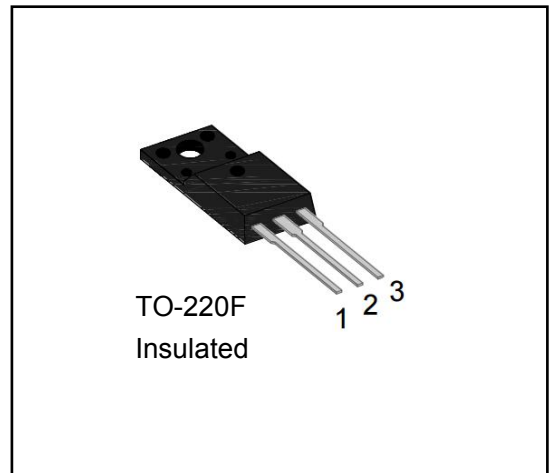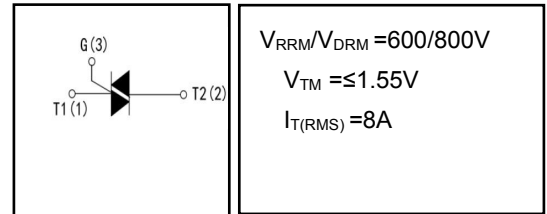

### 4 Electrical Characteristics

#### 4.1 Absolute Maximum Ratings (T<sub>c</sub>=25°C, unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Repetitive peak off-state voltage (T <sub>j</sub> =25°C)	V <sub>DRM</sub>	600/800	V
Repetitive peak reverse voltage (T <sub>j</sub> =25°C)	V <sub>RRM</sub>	600/800	V
Non repetitive surge peak Off-state voltage	V <sub>DSM</sub>	+ 100	V
Non repetitive peak reverse voltage	V <sub>RSM</sub>	+ 100	V
RMS on-state current	I <sub>T(RMS)</sub>	8	A
Non repetitive surge peak on-state current	I <sub>TSM</sub>	tp=8.3ms	84
		tp=10ms	80
I <sup>2</sup> t value for fusing (tp=10ms)	I <sup>2</sup> t	32	A
Repetitive rate of rise of on-state current (I <sub>TM</sub> =20A I <sub>G</sub> =50mA dI <sub>G</sub> /dt 50mA/ms)	dI <sub>T</sub> /dt	50	A/us
Peak gate current	I <sub>GM</sub>	4	A
Peak gate power	P <sub>GM</sub>	5	W
Average gate power dissipation	P <sub>G(AV)</sub>	1	W
Operating junction temperature range	T <sub>J</sub>	- 40 ~ 150	°C
Storage junction temperature range	T <sub>STG</sub>	- 40 ~ 150	°C

#### 4.2 Thermal Characteristics

PARAMETER	SYMBOL	VALUE	UNIT
Thermal Resistance, Junction to Case-sink	R <sub>thJC</sub>	4.6	°C/W

**4.3 Electrical Characteristics** (Tc=25°C, unless otherwise noted)

SYMBOL	PARAMETER	Test Conditions	Min	Typ	Max	Unit	
I <sub>GT</sub>	Triggering gate current	V <sub>D</sub> =12V R <sub>L</sub> =33Ω	I - II - III	-	-	35	mA
			IV	-	-	-	
			ALL	-	-	1.5	
V <sub>GT</sub>	Triggering gate voltage		-	-	1.5	V	
V <sub>GD</sub>	Non-triggering gate voltage	V <sub>D</sub> =V <sub>DRM</sub> T <sub>J</sub> =125°C R <sub>L</sub> =3.3KΩ	0.2	-	-	V	
I <sub>L</sub>	Latching Current	I <sub>G</sub> =1.2I <sub>GT</sub>	I - III	-	-	50	mA
			II	-	-	60	
I <sub>H</sub>	Holding Current	I <sub>T</sub> =100mA	-	-	40	mA	
dV/dt	Critical Rate of Rise of Off-state Voltage	V <sub>D</sub> =2/3V <sub>DRM</sub> Gate Open T <sub>J</sub> =125°C	500	-	-	V/us	
V <sub>TM</sub>	Peak Forward On-State Voltage	I <sub>TM</sub> =11A t <sub>p</sub> =380us	-	1.32	1.55	V	
I <sub>DRM</sub>	Maximum forward or reverse leakage current	V <sub>D</sub> =V <sub>DRM</sub> V <sub>R</sub> =V <sub>RRM</sub>	T <sub>J</sub> =25°C	-	-	10	uA
I <sub>RRM</sub>	Maximum reverse leakage current		T <sub>J</sub> =125°C	-	-	1	mA

**5 Typical characteristics diagrams**

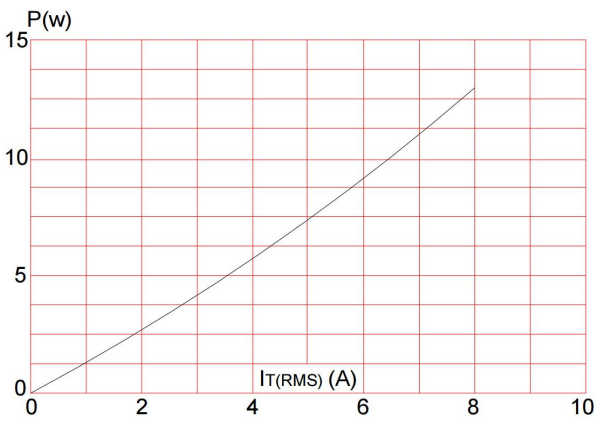


FIG.1: Maximum power dissipation versus RMS on-state current

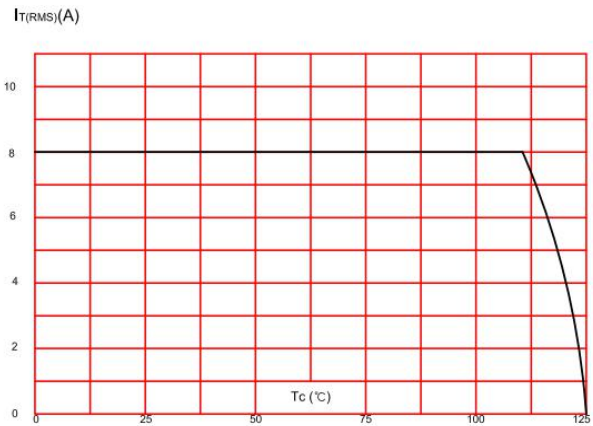


FIG.2: RMS on-state current versus case temperature

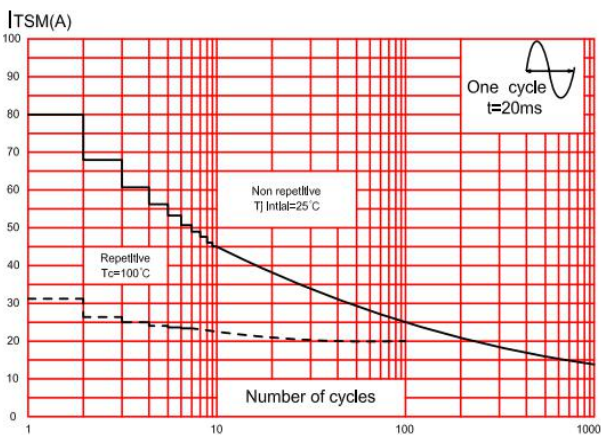


FIG.3: Surge peak on-state current versus number of cycles

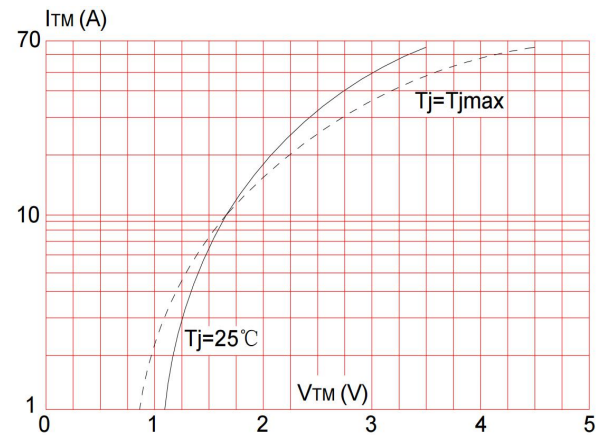


FIG.4: On-state characteristics (maximum values)

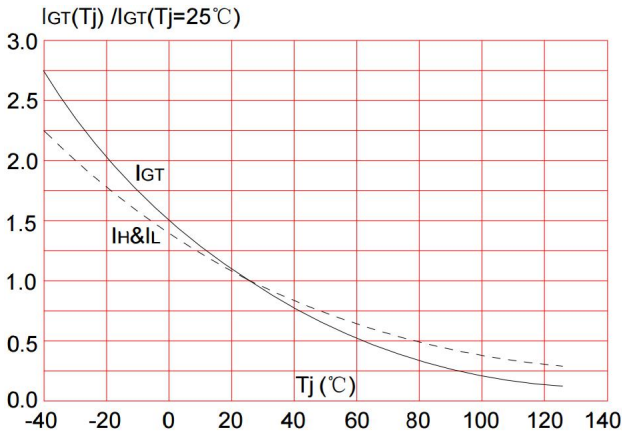


FIG.5: Relative variations of gate trigger current, holding current and latching current versus junction temperature

## 6 Product Names Rules

**BCR 08 600 CW**

B:Bi-directional  
C:Controlled  
R:Rectifier

Rated Current Code  
With 2 Digital,  
For Example:  
08 on behalf of  $I_T(RMS)=8A$

Rated Voltage Code  
With 2Letter,For Example:  
SW on behalf of  $I_{GT3} \leq 10mA$ ,  
CW on behalf of  $I_{GT3} \leq 35mA$ ,  
BW on behalf of  $I_{GT3} \leq 50mA$ ,


Rated Voltage Code  
With 3 Digital, For Example:  
600on behalf of 600V,  
800on behalf of 800V,

## 7 Product Specifications and Packaging Models

Product Model	Package Type	Mark Name	RoHS	Package	Quantity
BCR08	TO-220F	BCR08	Pb-free	Tube	1000//box

**8 Dimensions**

**TO-220F PACKAGE OUTLINE DIMENSIONS**

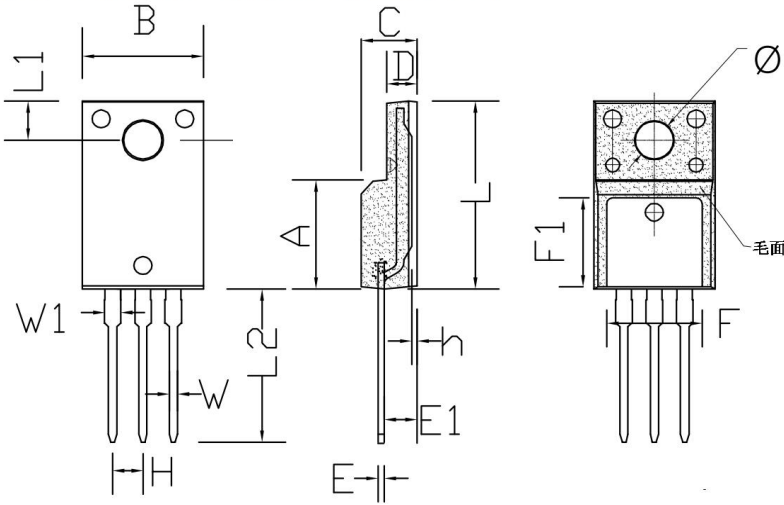

Symbol	DimensionsIn Millimeters		DimensionsIn Inches	
	min.	max.	min.	max.
A	8.80	9.30	0.346	0.366
B	10.00	10.50	0.394	0.413
C	4.30	4.90	0.169	0.193
D	2.30	2.70	0.091	0.106
L	15.55	16.15	0.612	0.636
h	0.40	0.60	0.016	0.024
L1	3.15	3.55	0.124	0.140
L2	12.65	13.35	0.498	0.526
W	0.70	0.90	0.028	0.035
W1	1.15	1.55	0.045	0.061
H	2.54 TYP		0.100 TYP	
E	0.48	0.53	0.019	0.021
φ	2.90	3.40	0.114	0.134
E1	2.40	2.90	0.094	0.114
F	7.75	8.25	0.305	0.325
F1	7.35	7.85	0.289	0.309

**9 Attentions**

- ROUM Semiconductor Technology CO.,LTD. reserves the right to change the specification without prior notice! The customer should obtain the latest version of the information before making the order and verify that the information is complete and up to date.
- It is the responsibility of the purchaser for any failure or failure of any semiconductor product under certain conditions. It is the responsibility of the purchaser to comply with safety standards and to take safety measures in the system design and machine manufacturing of Roma products in order to avoid potential risk of failure. Injury or property damage.
- Product promotion is endless, our company will be dedicated to provide customers with better products.

**10 Appendix**

Revision history:

Date	REV.	Description	Page
2017.08.21	1.0	Original	